

3 Main Features

Standards	IEEE802.3 10Base-T,IEEE802.3u 100Base-TX, IEEE802.3ab 1000Base-T,IEEE802.3az
Network Media (Cable)	10BASE-T: UTP category 3,4,5 cable (maximum 100m) 100BASE-Tx: UTP category 5, 5e cable (maximum 100m) 1000BASE-T: UTP category 5e, 6 cable (maximum 100m)
Number of Ports	5 x 10/100/1000Mbps Auto-Negotiation ports
LED Indication	Power, Link/Act LEDs
Transfer Method	Store-and-Forward
Switching Capacity	10Gbps
Power Input:	DC 5V /0.5A(adapter)
Consumption	Max2.3W
Frame Filtering and Forward Rate	10Mbps: 14880pps 100Mbps: 148800pps 1000Mbps: 1488000pps
Dimensions	100*69*24 mm (L x W x H)
Environment	Operating Temperature: 0°C-40°C Working Humidity: 10%-90%(non-condensing) Storage Temperature: -40°C-70°C Storage Humidity: 5%-90%(non-condensing)

CE Mark Warning

This is a class B product. In a domestic environment, this product may cause radio interference, in which case the user may be required to take adequate measures.

EU declaration of conformity

Cudy hereby declares that the device is in compliance with the essential requirements and other relevant provisions of directives 2014/30/EU, 2014/35/EU, 2009/125/EC and 2011/65/EU. The original EU declaration of conformity may be found at <http://www.cudy.com/en/ce>

For support and warranty, please visit: <http://www.cudy.com/>. Specifications are subject to change without notice. Cudy is a registered trademark of Shenzhen Cudy Technologies Co., Ltd. Other brands and product names are trademarks or registered trademarks of their respective holders. Copyright©2022 Shenzhen Cudy Technology Co., Ltd. All rights reserved.



Quick Installation Guide

5-Port 10/100/1000Mbps Desktop Switch

Model: GS105D




Email:
support@cudy.com




Website:
www.cudy.com

1 Physical Connection

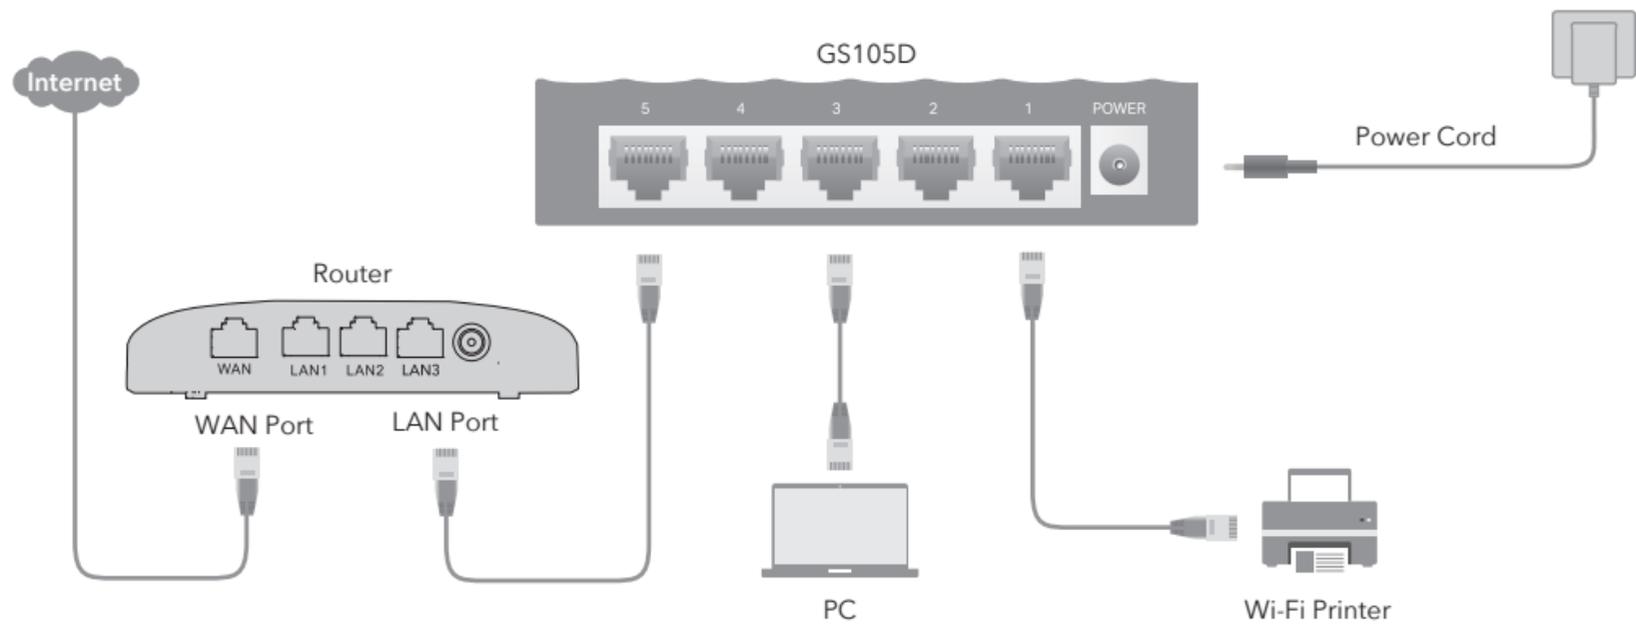

2 LED Indication

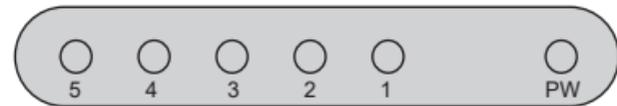

Power

On: Power on
Off: Power off

**Link / Act
(port 1-5)**

On: Link present but no activity
Flashing: Transmitting/receiving data
Off: No link